USER MANUAL

Multi-Alert System
With
Dual Alarm Clock

MA-3000Ck

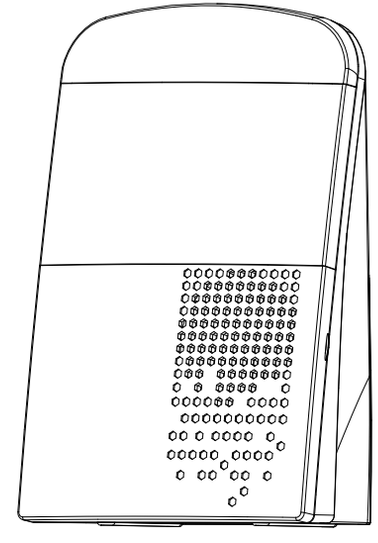

RECEIVER

Parts and Function

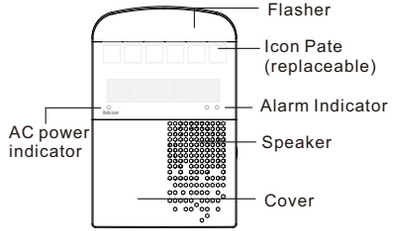

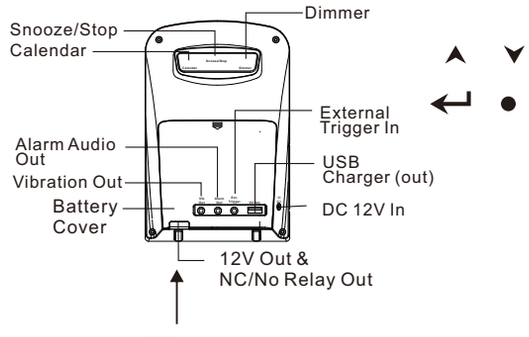

The connect is Inside the battery cover

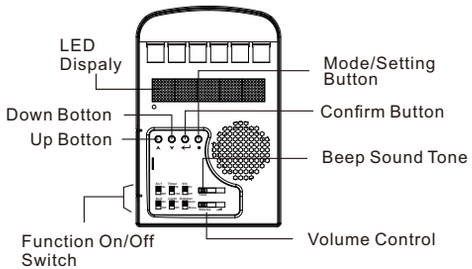

Power

The receiver powered by a 12V 1A AC/DC adaptor and backup by 3 pieces 'C' size batteries. Install the backup batteries avoid the clock reset and lost alert information when ac power fail. The AC power indicator will lit when the ac power is good.

Open the battery cover to install the batteries.

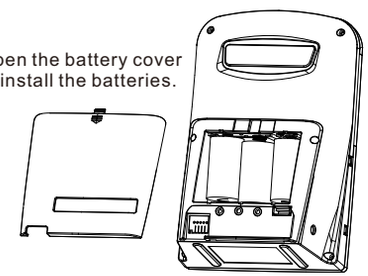

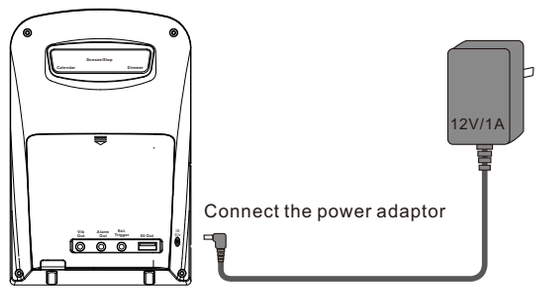

Connect the power adaptor

** When the AC power and the backup batteries are lost. the display time will blink to tell you the time is reset. Please re-adjust the clock.

** If ac power is fail, the USB charger, Vibration pad, and 12V output will not work.

Battery Low

Receiver unit:

When the backup batteries are low voltage, the low battery information "**BattLo**" will show on the display for 1 second every 15 seconds. Replace the batteries as soon as possible.

Sensor unit

When the battery of the sensor/Bell pusher is low voltage. It will send a battery low information with the trigger signal to the receiver. The receiver will blink the zone icon to indicate this sensor battery is low voltage. Replace the battery as soon as possible.

Setting

Please ensures the sound volume is not on the min position before setting.

SET Calendar (Set Cal)

- Press Mode ● button once, The display show **Set Cal**.
- Press confirm ↵ button to set calendar year. Press Up ▲ / Down ▼ button adjust the year, the year "up to 2099
- Press confirm ↵ button to set calendar month. Press Up ▲ / Down ▼ button adjust the month. Press confirm

SET Clock (Set Ck)

The time display will blinking when install batteries and connect to ac power. Please adjust the clock to keep the time is correct.

- Press Mode ● button twice, The display show **Set Ck**.
- Press confirm ↵ button to set time format 12 /24 hour. Press Up ▲ / Down ▼ button select the 12 or 24 hour format.
- Press confirm ↵ button jump to set minute. Press Up ▲ / Down ▼ button adjust the minute. Press confirm ↵ button to set hour. Press Up/ Down button adjust the Hour.
- Press confirm ↵ button to finishing and exit the time setting mode.

  *** Each time you press the confirm button, the time second will reset to zero. (The clock will run from zero second after you set the clock.)

SET Alarm Time (Set A1 or A2)

- Press Mode ● button three or four time, The display show **Set A1** or **A2**.
- Press confirm ↵ button to set alarm minute. Press Up ▲ / Down ▼ button to adjust the alarm minute.
- Press confirm ↵ button to set alarm hour. Press Up ▲ / Down ▼ button to adjust the alarm hour.
- Press confirm ↵ button to set alarm melody. Press Up ▲ / Down ▼ button to select the alarm melody.
- Press confirm ↵ button to set vibration on or off. Press Up ▲ to turn on the vibrator. Press down ▼ to turn off vibrator.
- Press confirm ↵ button to set 12V output on or off. Press Up ▲ to turn on the 12V output. Press down▼ to turn off vibrator the 12V output.
- Press confirm ↵ button to set relay output on or off. Press Up ▲ to turn on the relay output. Press down ▼ to turn off vibrator the relay output.
- Press confirm ↵ button to finishing and exit the time setting mode.

Please do not forget turn the alarm switch inside the front cover.

Matching (Pair)

- Press Mode ● button five time, The display show **Pair**
- Press confirm ↵ button to entering to pair mode. the display show Zone: -1 or Zone:1

  Zone 1 = Zone 1 is empty; Zone: 1 = Zone 1 is already paired with the sensor, and if it continues, the new sensor will replace the old one.
- Press up ▲ or down ▼ button to select the zone you want to pair.
- Trigger the transmitter/sensor you want to pair. The display will show linked when the pair is success. then the receiver show the sensor name, Press confirm ↵ button to confirm or press up ▲ /down ▼ button to select an other sensor name.

If it do not show "linked" information, it show other zone number when trigger the sensor. This sensor is already paired in other zone.

SENSOR NAME	Defult	Option	Option
Door Bell	Bell	B. Bell	F. Bell
Door/window Sensor	Window	Door	Invade
Mailbox Sensor	Mail	M. Box	Letter
Fall sensor	Fall Al	Pad	Help
Flood detector	Flood	Empty	Full
Toilet pull sensor	Toilet	Help	Slip
Magnet sensor	Magnet	Steal	Lost
Entry mat	Mat	Escape	Enter
PIR/Driveway sensor	PIR	Road	Invade
Sound sensor	S. Alert	Cry	Sound
Telephone ring transmitter	Phone	Ring	Call
Garage door	Garage	Open	G.Door
Gas detector	Gas	Danger	Alarm
T3	Smoke	Danger	Fire
T4	CO	Danger	Fire

- Then display will show the melody ♪. Press confirm ↵ button to confirm the default melody or press up ▲ / down ▼ button to select an other melody. (each type of sensor have a default melody)

  The melody number from 00 to 32, The #32 is a beep tone , you can adjust the tone lever to change the pitch of the sound.

  *** Select 'None' to mute this sensor

SENSOR NAME	Defult Sound#	SENSOR NAME	Defult Sound#	SENSOR NAME	Defult Sound#	SENSOR NAME	Defult Sound#
Door Bell	1	Flood detector	14	PIR/Driveway sensor	13	Gas detector	10
Door/window Sensor	28	Toilet pull sensor	27	Sound sensor	31	T3	13
Mailbox Sensor	12	Magnet sensor	17	Phone Ring	19	T4	13
Fall sensor	29	Entry mat	15	Garage door	6		

- Press confirm ⏎ button to set vibration on or off. Press Up to turn on the vibrator. Press down to turn off vibrator.
- Press confirm ⏎ button to set 12V output on or off. Press Up to turn on the 12V output. Press down to turn off vibrator the 12V output.
- Press confirm ⏎ button to set relay output on or off. Press Up to turn on the relay output. Press down to turn off vibrator the relay output.
- Press confirm ⏎ button to finishing and goto next zone pairing.

Replace the icon plate

After pairing the sensor/bell pusher, do not forget change the sensor indication icon come withe the sensor. Please keep the original icon plate for unpair the zone.



Open the display lens by nails



Press the bottom of the icon plate. the top of the icon plate will go out



Tack out the icon plate and replace the correct one.



Press the top of the icon plate to fix it. Cover back the display lens

To remove the sensor from the receiver memory (unpair).

- Press Mode button five time, The display show **Pair**
- Press confirm ⏎ button to entering to pair mode. the display show Zone -1 or Zone:1
- Press up or down button to select the zone you want to unpair.
- Press and hold the up and down buttons for approx. 3 seconds. The receiver will return a beep tone to confirm this zone is clear. The display will change to show 'zone - x'. (' X ' is zone number, '-' is indicating this zone is empty.)

When the zone is paired with sensor the display will show ":" between the "zone" and zone number. eg. zone: 1.
When the zone is empty, the display will show "-" between the "zone" and zone number. eg. zone- 1.

Other Setting

Alarm 1 On/Off (clock alarm 1)
Slide the AL1 switch to on or off position. When Alarm 1 is on the alarm1 indicator will light up

Alarm 2 On/Off (clock alarm 2)
Slide the AL2 switch to on or off position. When Alarm 2 is on the alarm2 indicator will light up.

Timer
Slide the timer switch to select the duration of the relay output and 12V output .

Light On/Off
Slide the master light switch to on or off flasher light.

Vibrator On/Off
Slide the Vib master switch to turn on or off vibrator. This is a master switch.

Dimmer Mode
Auto: The LED display dims automatically in the dark .
Manual: Adjust the LED display brightness by pressing the dimmer button.

Tone Adjust
Slide the tone lever to adjust the tone of the beep sound alert (Sound number 32).

Volume Control
Slide the volume to adjust master sound volume.

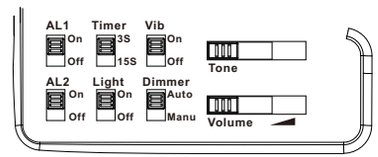

Show Calendar
Press the calendar button once, the display will show the calendar for 10 seconds.



Dimmer
Press the dimmer button to select the brightness of the display

Outlet and inlet

DC Jack : Main power 12V 1A input.





Vib Out: Vibrator connect to this outlet. It provide 12V output to drive the vibrator.



5V output: This is a standard USB socket. It provide DC5V / 1A to charge the mobile device. The charge current depend on the max current of power adaptor and the mobile device .(max. output current is 1A)

Alarm Out: This is a audio signal output. It con connect to the external amplifier or other alarm system.



Alarm System or Amplifier



Ext. Trigger: This is a external trigger input. you can apply a 3-12V DC to trigger this input.

Bluetooth receiver
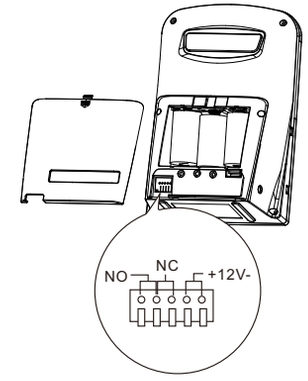
This receive provide some output terminal for special application.
Normal Open(NO) terminal:
This 2 terminal pin is open circuit normally, It will close circuit when the receiver be triggered. The duration is depend on the timer switch setting.
Normal Close (NC) terminal:
This 2 terminal pin is close circuit normally, It will open circuit when the receiver be triggered. The duration is depend on the timer switch setting.
Normally open and normally closed can only choose one connection.
(The rating do not exceed 48V/500mA)
12V out terminal:
This 2 terminal pin can provide 12v output to drive some device when the receiver be triggered. The duration is depend on the timer switch setting. The device current do not exceed 200mA.